
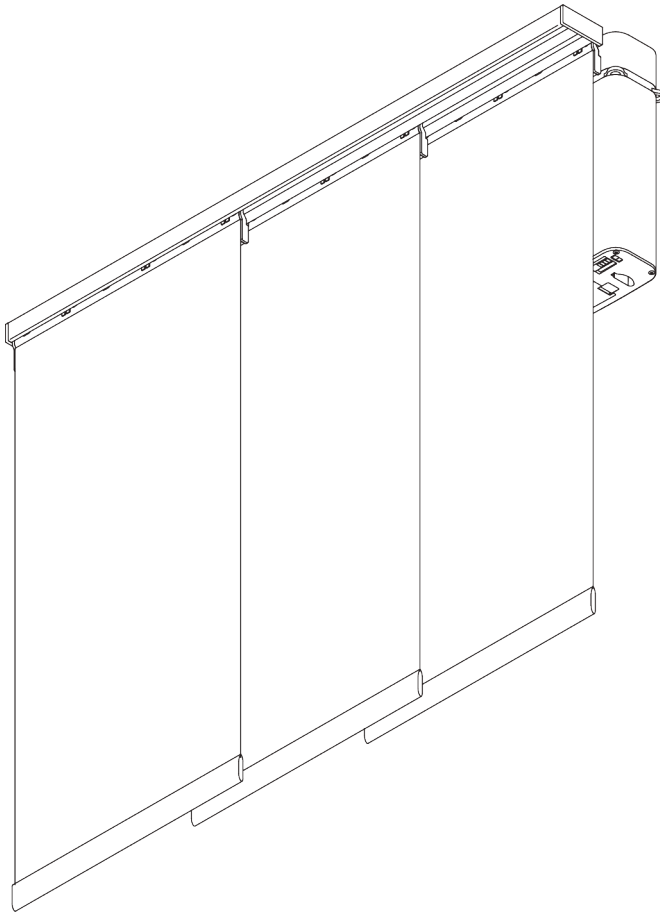


SG 2750



PRODUCT INFORMATION


- **Operation:** motorised
- **Range:** S - L
- **Fitting:** ceiling
- **Colours:** white RAL 9016; special colours or anodised aluminum possible
- **Fabrics:** refer to Silent Gliss fabric collection

Features:


- 2-component (2C) roller technology
- Silent and smooth running
- Aluminium carriers
- Applicable with electric curtain track system SG 5600

SYSTEM SPECIFICATIONS

A. SYSTEM DIMENSIONS



6 m




4 m




max. 2 kg per m

B. PROFILE


Profile information




SG 10123
Profile 3-channel




SG 10124
Profile 4-channel



SG 10125
Profile 5-channel




SG 2006
Bottom bar 28x3 mm




SG 10230
Carrier alu

C. HOW TO MEASURE

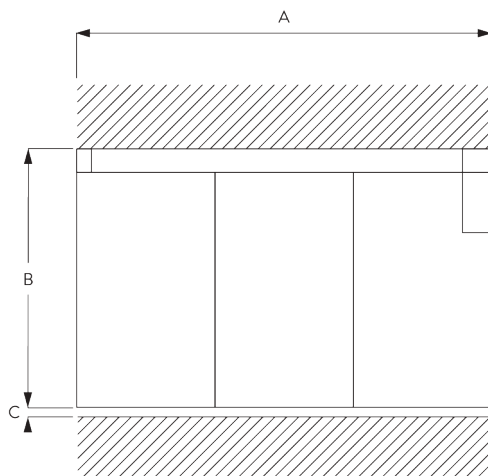

A: System width
B: System height
C: Distance between floor and fabric

Dimensions of Panels

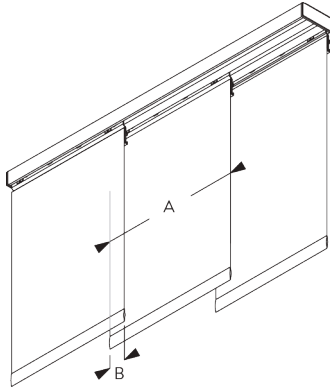

A: Recommended panel width: 500 - 1200

B: Overlap: min. 50

D. SPECIFICATION

TEXT


Silent Gliss SG 2750 Electrically Operated Panel Glide System. Supplied made to measure and complete comprising profiles SG 10123 / SG 10124 / SG 10125 as necessary with carriers SG 10230 with associated components and bottom weight SG 2006. Fabric panels stack right hand single / left hand single / pair / centre. Electrically operated (incorporating electric curtain track system SG 5600). Ceiling fixed using clamps SG 3003 / SG 3004. Fabric to be chosen from Silent Gliss fabric collection, Price Group 1 / 2 / 3 / 4.

FITTING

A. FITTING INFORMATION



For detailed fitting information, visit the [Silent Gliss website](#).

Fixing points




B. CEILING FITTING

With SG 5600

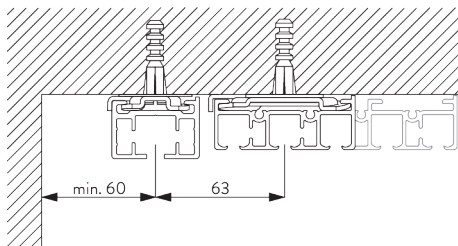


SG 3003
Clamp



SG 3004
Clamp

SYSTEM OPTIONS

A. MOTORISATION

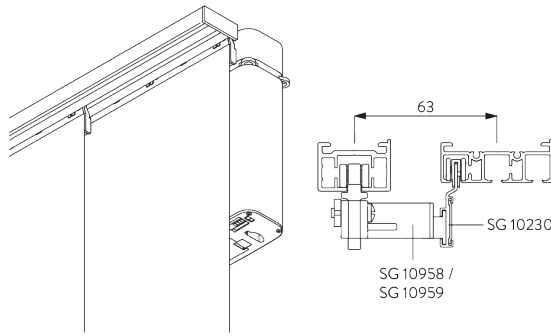

Motorised with SG 5600

- Single stack systems: carrier SG 10958
- Pair stack systems: carriers SG 10958 / SG 10959

For further details refer to the electric curtain track catalogue.

B. PANEL STACKING



Single stack

Note: dot = fixed panel




Pair stack

Note: dot = fixed panel

Other variations are possible.


PARTS

A. STANDARD PARTS

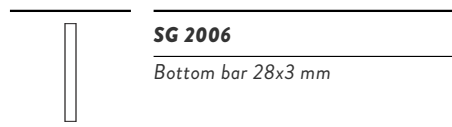


SG 2006

Bottom bar 28x3 mm




SG 2539

Tape




SG 3003

Clamp



SG 10123

Profile 3-channel




SG 10140

Angle




SG 10143

Cover




SG 10146

Angle




SG 10156

End stop

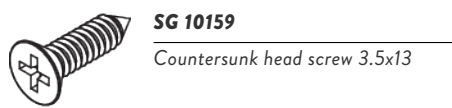


SG 10159

Countersunk head screw 3.5x13




SG 10200

2C roller




SG 10230

Carrier alu

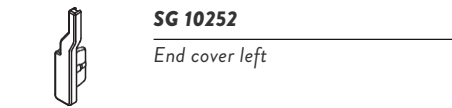


SG 10252

End cover left

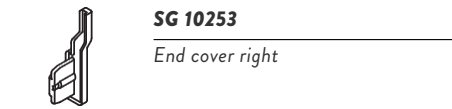


SG 10253

End cover right



SG 10958


Panel carrier for electric track

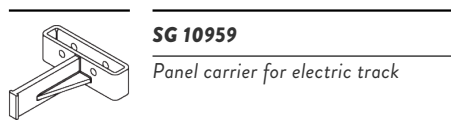

SG 10959


Panel carrier for electric track

B. OPTIONAL PARTS

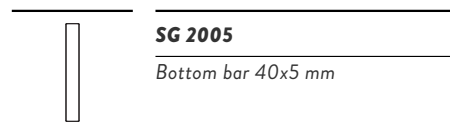


SG 2005

Bottom bar 40x5 mm




SG 6024

Connection bridge




SG 10124

Profile 4-channel




SG 10125

Profile 5-channel



SG 10144

End cover



SG 10145

End cover

